


MAP® UL2464 EIA RS-232 COMPUTER CABLE

產品說明 PRODUCT DESCRIPTION

- *導體為鍍錫銅 Tinned stranded copper conductor
- *半硬質 PVC 絕緣 Semi-rigid PVC insulation
- *芯線集合後鋁箔帶及編織網隔離 Cross cable under Al and braid shield
- *鍍錫軟銅地線 Tinned stranded copper drain wire
- *資料傳輸電纜,PVC 披覆 Data transmission cable,PVC jacket
- *額定溫度 80°C Rated temperature 80 °C
- *額定電壓 300V Rated voltage:300V
- *符合 VW-1 Flame VW-1 Approval



MAP®

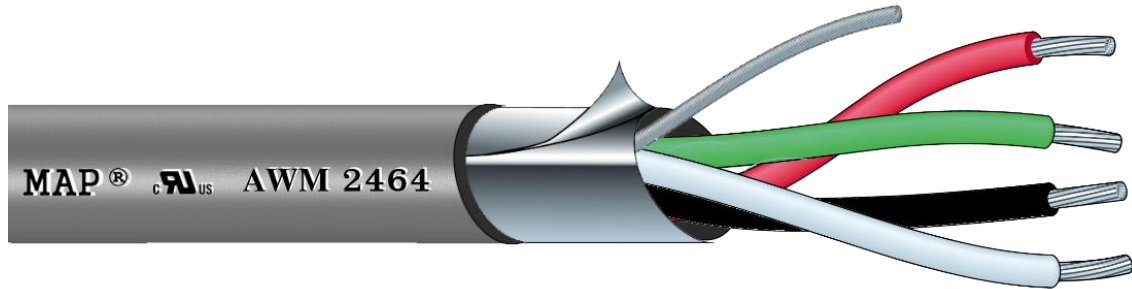

單遮蔽電腦線(AL+Drain)符合國際電工法規 EIA RS-232 CAD/CAM 之規定。適用於螢幕顯示器.儀器.控制器.自動化設備等...

This computer can be used in monitor,machine tools,controller, automation equipment. Lead-free,Resistance-abrasion.

SINGLE 單隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	28	7/0.127	3	AL Foil 100%	0.229 mm	0.76 mm	3.8 mm ± 5%
UL2464	28	7/0.127	4	AL Foil 100%	0.229 mm	0.76 mm	4.0 mm ± 5%
UL2464	28	7/0.127	7	AL Foil 100%	0.229 mm	0.76 mm	5.0 mm ± 5%
UL2464	28	7/0.127	9	AL Foil 100%	0.229 mm	0.76 mm	6.0 mm ± 5%
UL2464	28	7/0.127	25	AL Foil 100%	0.229 mm	0.76 mm	8.0 mm ± 5%
UL2464	28	7/0.127	37	AL Foil 100%	0.229 mm	0.76 mm	9.0 mm ± 5%
UL2464	28	7/0.127	50	AL Foil 100%	0.229 mm	0.76 mm	10.5 mm ± 5%

SINGLE 單隔離/鋁箔遮蔽




MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	26	7/0.16	3	AL Foil 100%	0.229 mm	0.76 mm	3.6 mm ± 5%
UL2464	26	7/0.16	4	AL Foil 100%	0.229 mm	0.76 mm	4.0 mm ± 5%
UL2464	26	7/0.16	7	AL Foil 100%	0.229 mm	0.76 mm	4.5 mm ± 5%
UL2464	26	7/0.16	9	AL Foil 100%	0.229 mm	0.76 mm	6.0 mm ± 5%
UL2464	26	7/0.16	25	AL Foil 100%	0.229 mm	0.76 mm	8.5 mm ± 5%

SINGLE 單隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	24	7/0.203	2	AL Foil 100%	0.229 mm	0.76 mm	4.1 mm ± 5%
UL2464	24	7/0.203	4	AL Foil 100%	0.229 mm	0.76 mm	4.5 mm ± 5%
UL2464	24	7/0.203	7	AL Foil 100%	0.229 mm	0.76 mm	5.5 mm ± 5%
UL2464	24	7/0.203	9	AL Foil 100%	0.229 mm	0.76 mm	6.0 mm ± 5%
UL2464	24	7/0.203	12	AL Foil 100%	0.229 mm	0.76 mm	6.5mm ± 5%
UL2464	24	7/0.203	16	AL Foil 100%	0.229 mm	0.76 mm	7.5mm ± 5%
UL2464	24	7/0.203	25	AL Foil 100%	0.229 mm	0.76 mm	9.0 mm ± 5%

SINGLE 單隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	22	17/0.16	2	AL Foil 100%	0.229 mm	0.76 mm	4.2 mm ± 5%
UL2464	22	17/0.16	4	AL Foil 100%	0.229 mm	0.76 mm	5.0 mm ± 5%
UL2464	22	17/0.16	7	AL Foil 100%	0.229 mm	0.76 mm	6.3 mm ± 5%
UL2464	22	17/0.16	9	AL Foil 100%	0.229 mm	0.76 mm	6.5 mm ± 5%
UL2464	22	17/0.16	12	AL Foil 100%	0.229 mm	0.76 mm	7.0 mm ± 5%
UL2464	22	17/0.16	16	AL Foil 100%	0.229 mm	0.76 mm	8.0 mm ± 5%
UL2464	22	17/0.16	25	AL Foil 100%	0.229 mm	0.76 mm	9.5 mm ± 5%

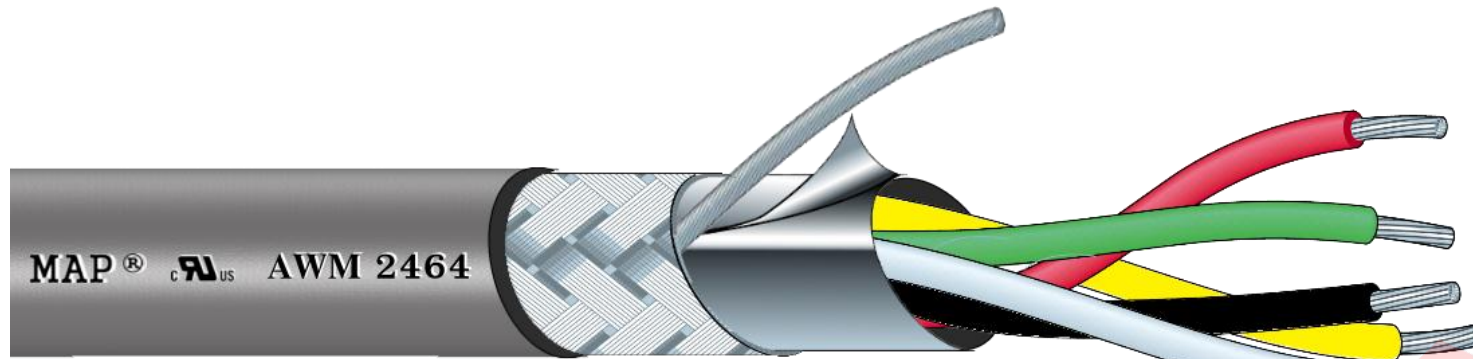

雙遮蔽電腦線(Braid+AL+Drain):符合國際電工法規 EIA RS-232 CAD/CAM 之規定。適用於伺服器.機床.主控制台.自動化設備等...

This computer can be used in server,machine,main controller, auto-equipment. Lead-free,Resistance-abrasion.

DOUBLE 雙隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	BRAID COVERAGE	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	28	7/0.127	3	AL Foil 100%	85%	0.25 mm	0.80 mm	3.8 mm ± 5%
UL2464	28	7/0.127	4	AL Foil 100%	85%	0.25 mm	0.80 mm	4.5 mm ± 5%
UL2464	28	7/0.127	7	AL Foil 100%	85%	0.25 mm	0.80 mm	5.0 mm ± 5%
UL2464	28	7/0.127	9	AL Foil 100%	85%	0.25 mm	0.80 mm	5.8 mm ± 5%
UL2464	28	7/0.127	25	AL Foil 100%	85%	0.25 mm	1.02 mm	7.5 mm ± 5%
UL2464	28	7/0.127	37	AL Foil 100%	85%	0.25 mm	1.02 mm	9.0 mm ± 5%
UL2464	28	7/0.127	50	AL Foil 100%	85%	0.25 mm	1.02 mm	10.5 mm ± 5%

DOUBLE 雙隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	BRAID COVERAGE	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	26	7/0.16	3	AL Foil 100%	85%	0.229 mm	0.76 mm	4.2 mm ± 5%
UL2464	26	7/0.16	4	AL Foil 100%	85%	0.229 mm	0.76 mm	4.7 mm ± 5%
UL2464	26	7/0.16	7	AL Foil 100%	85%	0.229 mm	0.76 mm	5.5 mm ± 5%
UL2464	26	7/0.16	9	AL Foil 100%	85%	0.229 mm	0.76 mm	6.0 mm ± 5%
UL2464	26	7/0.16	25	AL Foil 100%	85%	0.229 mm	0.76 mm	9.0 mm ± 5%

DOUBLE 雙隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	BRAID COVERAGE	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	24	7/0.203	2	AL Foil 100%	85%	0.229 mm	0.76 mm	4.5 mm ± 5%
UL2464	24	7/0.203	4	AL Foil 100%	85%	0.229 mm	0.76 mm	5.0 mm ± 5%
UL2464	24	7/0.203	7	AL Foil 100%	85%	0.229 mm	0.76 mm	6.0 mm ± 5%
UL2464	24	7/0.203	9	AL Foil 100%	85%	0.229 mm	0.76 mm	6.5 mm ± 5%
UL2464	24	7/0.203	12	AL Foil 100%	85%	0.229 mm	0.76 mm	7.0 mm ± 5%
UL2464	24	7/0.203	16	AL Foil 100%	85%	0.229 mm	0.76 mm	8.0 mm ± 5%
UL2464	24	7/0.203	25	AL Foil 100%	85%	0.229 mm	0.76 mm	9.0 mm ± 5%

DOUBLE 雙隔離/鋁箔遮蔽

MODEL	AWG	NO. OF COND.	NO.OD CORE	SHIELD MATERIAL	BRAID COVERAGE	INSULATION THICKNESS	JACKET THICKNESS	OVERALL DIAMETER
UL2464	22	17/0.16	2	AL Foil 100%	85%	0.229 mm	0.76 mm	5.0 mm ± 5%
UL2464	22	17/0.16	4	AL Foil 100%	85%	0.229 mm	0.76 mm	5.5 mm ± 5%
UL2464	22	17/0.16	7	AL Foil 100%	85%	0.229 mm	0.76 mm	6.5 mm ± 5%
UL2464	22	17/0.16	9	AL Foil 100%	85%	0.229 mm	0.76 mm	7.0 mm ± 5%
UL2464	22	17/0.16	12	AL Foil 100%	85%	0.229 mm	0.76 mm	7.8 mm ± 5%
UL2464	22	17/0.16	16	AL Foil 100%	85%	0.229 mm	0.76 mm	8.5 mm ± 5%
UL2464	22	17/0.16	25	AL Foil 100%	85%	0.229 mm	0.76 mm	10.0 mm ± 5%