



SPECIFICATION

產品規格書

產品名稱 / Model Name : R4B-800GFV2

版本 / Revision : 1.3

產品描述 / Description : 800W+800W Mini Redundant Power Supply Front Type.

修改紀錄 / Revision History


版本 Rev.	日期 Date	版本描述 Revision Description	修改者 Modify By	客戶認可 Cust. Approval	認可日期 App. Date
1.0	AUG.08 2011	Modified the circuit for DC-DC backplane	Kevin Chen		AUG.10, 2011
1.1	Dec.06 2011	Modified the operation temp. to 50°C	Jacky Jan		Dec.07, 2011
1.2	Jan. 09 2012	Modified the 6.3 value.	Jacky Jan		Jan. 09, 2012
1.3	Feb.09,2012	14.1 Exchange the bracket position from power supply sides and keep the same fix holes of chassis.	Jacky Jan		Feb.15, 2012

提交 / Prepared BY	檢查 / Checked BY	批准 / Approved BY
	KEVIN	JACKY



目錄 Contents

- 1. 概述 General Description**
- 2. 輸入規格 Input Characteristics**
 - 2.1. 交流輸入電壓和頻率範圍 AC Input voltage and frequency
 - 2.2. 輸入電流與浪湧電流 Input current and inrush current
 - 2.3. 功率因數 Power Factor
- 3. 效率 Power Efficiency**
- 4. 輸出規格 Output Characteristics**
 - 4.1. 輸出電壓電流調整率 Output Voltage & Current Regulation
 - 4.2. 輸出紋波和噪音 DC Output Ripple & Noise
 - 4.3. 輸出保持時間 Hold Up Time
 - 4.4. 上升時間 Rise Time
 - 4.5. 動態響應時間 Dynamic load response time
 - 4.6. 遠端開關控制 Remote on/off control
- 5. 電源良好信號 Power good signal**
- 6. 保護 PROTECTION**
 - 6.1. 過壓保護 Over voltage protection
 - 6.2. 低壓保護 Under-voltage protection
 - 6.3. 過流保護 Over current Protection
 - 6.4. 短路保護 Short circuit protection
 - 6.5. 過熱保護 Thermal Protection
- 7. 電源信號狀態 Power System Signal status**
 - 7.1. 蜂鳴器狀態 Buzzer status
 - 7.2. 燈號指示 LED indicators
 - 7.3. TTL信號 TTL signal
- 8. 負載均流 Load sharing**



9. 絕緣性能 Isolation

- 9.1. 絕緣電阻 Insulation Resistance
- 9.2. 耐壓絕緣 Dielectric Withstand Voltage
- 9.3. 漏電電流 Leakage current

10. 安全要求 Safety Requirements

11. 電磁相容 EMC

- 11.1. 電磁干擾 EMI
- 11.2. 電磁相容 EMS

12. 環境條件 Environmental

- 12.1. 溫度 Temperature
- 12.2. 環境濕度 Humidity
- 12.3. 海拔高度 Altitude
- 12.4. 振動耐受 Vibration
- 12.5. 衝擊耐受 Shock
- 12.6. 冷卻方式 Cooling Method

13. 可靠性 Reliability

- 13.1 平均故障失效時間 MTBF Qualification

14. 機械尺寸和電源連接器 Mechanical 2D Drawing and Power Connector

- 14.1. 外觀尺寸圖 Outside Dimension
- 14.2. 輸出端線材 DC Output cables



SURE STAR

1. 概述 General Description

This specification describes the performance characteristics of a 800 watts hot swappable, 1+1 power system with +3.3V,+5V,+12V, -12V main DC outputs, and 5V standby outputs. The system is configured to hold two identical 800W power supply modules, **SURE STAR** Model R4B-800GFV2.

2. 輸入規格 Input Characteristics

2.1. 交流輸入電壓和頻率範圍 AC Input voltage and frequency

最小值 Minimum	正常值 Nominal	最大值 Maximum	單位 Unit
90	100~240	264	伏特 VAC
47	50~60	63	赫茲 Hz

2.2. 輸入電流與浪湧電流 Input current and inrush current

交流輸入電壓 AC Input Voltage	最大輸入電流 MAX. Input Current per power supply module	浪湧電流 Inrush Current per power supply module
115Vac	12A	30A
230Vac	6A	60A

2.3. 功率因數 Power Factor

90Vac	115Vac	230Vac	264Vac
>0.99	>0.98	>0.95	>0.92

3. 效率 Power Efficiency

在滿載狀態，115 伏特 60 赫茲輸入下，電源效率為 80%(Min)。

The Minimum efficiency of the power supply is 80% at full load and 115Vac/60HZ input.



SURE STAR

4. 輸出規格 Output Characteristics

4.1. 輸出電壓電流調整率 Output Voltage & Current Regulation

輸出電壓 Output Voltage	最小電流 Min. Current	額定電流 Rated current	調整率 REGULATION
+3.3V	1A	32A	±5%
+5V	1A	25A	±5%
+12V	1A	65A	±5%
-12V	0A	0.8A	±5%
+5VSB	0.5A	3.5A	±5%

Note: 5V 和 3.3V 相加總不可超過 190 瓦.

The combined total power from 5V & 3.3V shall not exceed 190W.

4.2. 輸出紋波和噪音 DC Output Ripple & Noise

Output Voltage	Ripple & Noise (Max.)
+3.3V	60mVp-p
+5V	60mVp-p
+12V	120mVp-p
-12V	120mVp-p
+5VSB	50mVp-p

Note:

- 紋波和噪音頻寬設置在 20 兆赫茲。
Ripple & Noise bandwidth is set to 20MHz。
- 輸出端並聯一個 0.1 uF 陶瓷電容和一個 10 uF 電解電容，測試紋波和噪音。
Use a 0.1uF ceramic capacitor in parallel with a 10uF electrolytic capacitor at output connector terminals for ripple & noise measurements。

4.3. 輸出保持時間 Hold Up Time

Output Voltage	115VAC Input	230VAC Input
+3.3V	> 16ms	> 16ms
+5V	> 16ms	> 16ms
+12V	> 16ms	> 16ms
-12V	> 16ms	> 16ms
+5VSB	> 16ms	> 16ms

Note: 所有輸出在滿載狀態 All of dc output at full load.。



4.4. 上升時間 Rise Time

Output Voltage	115/230Vac Input & Full Load
+3.3V	20ms (max.)
+5V	20ms (max.)
+12V	20ms (max.)
-12V	20ms (max.)
+5VSB	20ms (max.)

Note: 上升時間為輸出電壓從10%上升至90%的時間。

The rise time measured is when the output voltages rise from 10% to 90% of specified output voltage V_{out} observed on the channel waveform.

4.5. 動態響應時間 Dynamic load response time

The following shall apply to the 3.3 V, 5 V, and 12 V outputs:

Output voltage for each output shall recover to within 5 % of its steady state level in less than 1 ms under the following conditions:

AC Input Voltage: 90VAC ~ 264VAC			
Repetition rate of 100Hz with 50 % duty cycle			
Output	Step Load Size	Load Slew Rate	Capacitive Load
+3.3V	30% to 100% to 30% load	0.5 A/u sec	6000uF
+5V	30% to 100% to 30% load	0.5 A/u sec	6000uF
+12V	60% to 100% to 60% load	1 A/u sec	6000uf
+5SB	0% to 100% to 0% load	0.5 A/u sec	350uF

4.6. 遠端開關控制 Remote on/off control

The main outputs of this power supply (3.3V,5V,12V,-12V) shall be energized when input signal*PSON is active. *PSON is an active low TTL compatible signal referenced to the +5V standby common. This input signal shall be an open collector signal capable of sinking a minimum of 1.6mA. When *PSON becomes inactive, the main outputs shall be disabled.

	PSU on	PSU off
PSON Signal	LOW (0.8V max)	HI (2V max)



5. 電源良好信號 Power good signal

The system shall have an active high TTL compatible signal capable of sinking 1mA and sourcing 100uA. The signal shall become active within 100 to 500 ms from the instant +5V output reaches a steady state level within the specified regulation limits. It shall become inactive at least 1 ms before +5V drops to below the lower regulation limit.

Power good @ 115/230VAC , Full Load	200ms ~ 500ms
Power Fail @ 115/230VAC , Full Load	1ms (Min.)

6. 保護 Protection

6.1. 過壓保護 Over voltage protection

Output	Min	Max	Comments
+3.3V	3.75V	4.3V	PSU shutdown
+5V	5.7V	6.9V	PSU shutdown
+12V	13V	14.3V	PSU shutdown

Note：應該在最大交流輸入電壓230伏和輕載、空載下測試。

The power supply shall be test at max AC voltage (230Vac) and min load or no load.

6.2. 低壓保護 Under-voltage protection

Output	Min	Max	Comments
+3.3V	2.0V	2.4V	PSU shutdown
+5V	3.3V	3.7V	PSU shutdown
+12V	8.5V	9.5V	PSU shutdown

Note：應該在最大交流輸入電壓230伏和輕載、空載下測試。

The power supply shall be test at max AC voltage (230Vac) and min load or no load.

6.3. 過流保護 Over current protection

Output	Over Current(Type)	Over Current(Max.)	Comments
+3.3V	$\geq 35.2A$	48A	PSU shutdown
+5V	$\geq 27.5A$	37.5A	PSU shutdown
+12V	$\geq 71.5A$	97.5A	PSU shutdown

Note：過流保護測試是在其他額定負載時測試。

The over current protection should be tested at other load rating.

6.4. 短路保護 Short circuit protection

Output	Comments
+3.3V	PSU shutdown
+5V	PSU shutdown
+12V	PSU shutdown

Note：短路保護測試是在其他額定負載時測試。

The Short circuit protection should be tested at other load rating.

6.5. 過熱保護 Thermal Protection

當外殼溫度超過86°C (±5°C)，電源將進入過熱保護狀態。當溫度恢復正常，而且電源重新啓動之後，可以恢復操作。

The power supply shall go into thermal protection as the case temperature exceeds 86°C (±5°C) limit. The output shall recover only when the temperature becomes normal and AC power is turned on again.

7. 電源信號狀態 Power System Signal status

7.1. 蜂鳴器狀態 Buzzer status

Power Supply Condition	Buzzer status
No AC power to all PSU	OFF
AC present/Only Standby Output On	OFF
Power supply DC outputs ON and OK	OFF
Power supply failure	Beeping

7.2. 燈號指示 LED indicators

Power Supply Condition	Power system status		Per Power Module status
LED Color	RED	GREEN	ORANGE
No AC power to all PSU	OFF	OFF	OFF
AC present/Only Standby Output On	ON	OFF	OFF
Power supply DC outputs ON and OK	OFF	ON	ON
Power supply failure	OFF	Blinking	OFF

7.3. TTL 信號 TTL signal

POWER SUPPLY CONDITION	OUTPUT CONDITION	
	Min.	Max.
NORMAL(POWER SUPPLY ON)	3V	5.25V
FAILURE(POWER SUPPLY OFF)	0V	1V

8. 負載均流 Load sharing

輸出電壓 Output Voltage	負載電流 Load Current	負載均流電壓 Load Share Voltage
+12V	1A	+0.48V ~ +0.52V
+5V	1A	+0.33V ~ +0.37V
+3.3V	1A	+0.33V ~ +0.37V

9. 絕緣性能 Isolation

9.1. 絕緣電阻 Insulation Resistance

Input To Output	500Vdc , 50M ohms Min.(at room Temperature)
Input To FG	500Vdc , 50M ohms Min.(at room Temperature)
Output To FG	Non Insulation

9.2. 耐壓絕緣 Dielectric Withstand Voltage

Input To Output	1834Vac (30 mA) for 1 Minute.
Input To FG	1834Vac (30 mA) for 1 Minute.
Output To FG	Non Insulation

9.3. 漏電電流 Leakage current

在120-264 伏特/50-60 赫茲情況下，最大漏電流為3.5mA。
3.5mA max. at 120~264Vac/50~60HZ.

10. 安全要求 Safety Requirements

- IEC 60950-1
- TUV EN 60950-1
- UL or cUL
- BSMI
- CCC



SURE STAR

11. 電磁相容 EMC

電源電磁干擾滿足以下標準

The power supply shall comply with the following criterion:

11.1. 電磁干擾 EMI

1) Conduction Emission: (傳導干擾度)

A.EN55022:2006/A1:2007 CLASS A; EN55024:1998/A1:2001/A2:20003.

B.CISPR PUB.22 and FCC PART 15 SUBPART B CLASS A.

2) Radiated Emission : (輻射干擾度)

A.EN55022:2006/A1:2007 CLASS A; EN55024:1998/A1:2001/A2:20003.

B.CISPR PUB.22 and FCC PART 15 SUBPART B CLASS A.

12. 環境條件 Environmental

12.1. Temperature

Operating : 0°C to +50°C

Non Operating: -20°C to +70°C

12.2. Humidity

Operating : 5% to 95%, non-condensing

Non Operating: 20% to 90%,non-condensing

12.3. Altitude

Operating: sea level to 7,000 feet

Non-operating: sea level to 40,000 feet

12.4. 振動耐受 Vibration

10-55Hz, 19.6m/s²(2G), 3minutes period, 60minutes each along X, Y and Z axis.

12.5. 衝擊耐受 Shock

49m/s²(5G),11ms, once each X, Y and Z axis.

12.6. 冷卻方式 Cooling Method

BY BALL BEARING DC FAN.


13. 可靠性 Reliability

13.1 平均故障失效時間 MTBF Qualification

Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C

14. 機械尺寸和電源連接器 Mechanical 2D Drawing and Power Connector

14.1. Outside Dimension: 199(D)x150(W)x86(H)mm

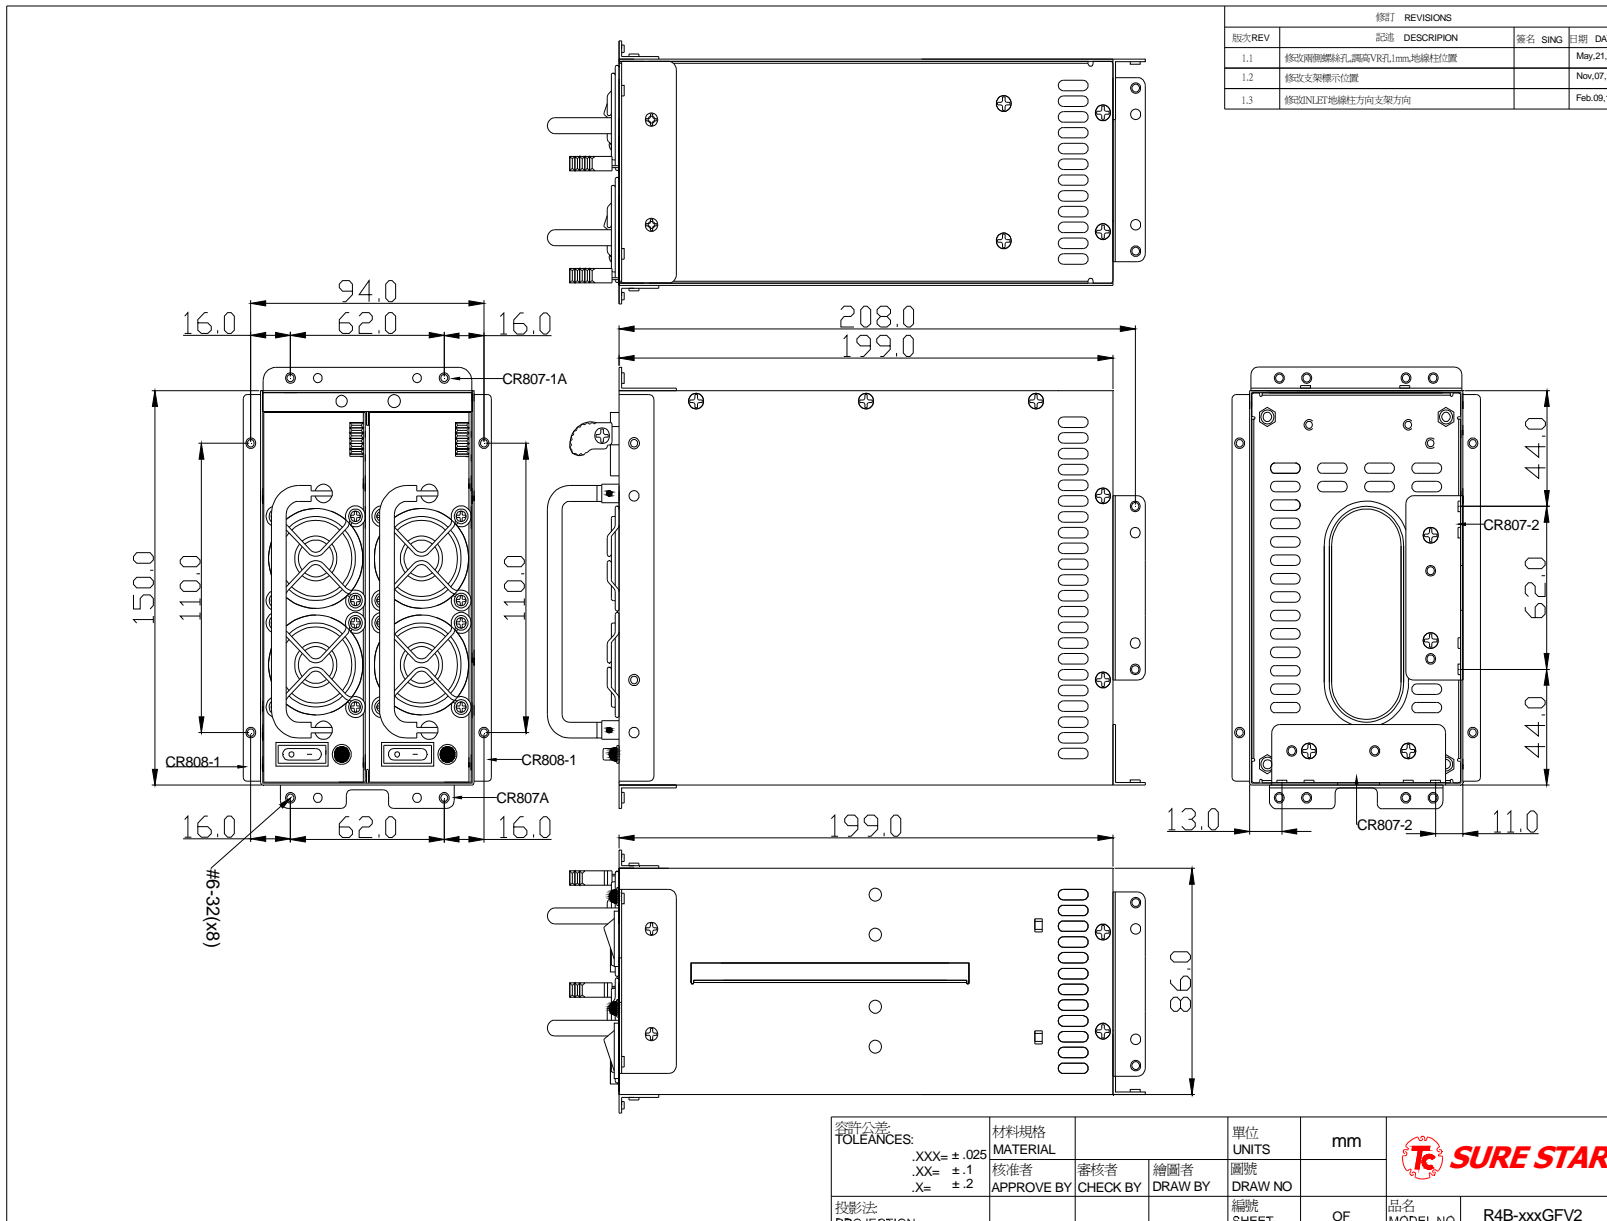

14.2. DC Output cables

