


MICRO SWITCH

MICRO SWITCH

CN-05

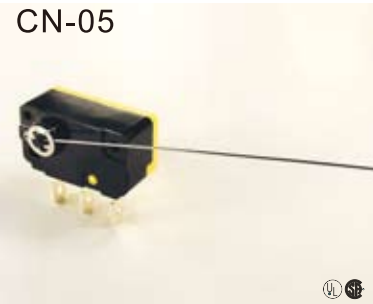

1A, 5A 125/250V AC
 SIZE: 31 x 17.5 x 14.4 mm
 Pitch: 9mm



DM1-00P



0.1A, 1A, 3A 125V AC
 SIZE: 12.8 x 6.5 x 5.7 mm
 OF: 60, 90, 110, 130g
 Pith: 5.08mm
 Terminal: PCB Type
 0.1A/None, 1A/UL, 3A/CE



DM1-01T



0.1A, 1A, 3A 125V AC
 SIZE: 12.8 x 6.5 x 5.7 mm
 OF: 20, 25, 30, 40g
 Pith: 5.08mm
 Lever: 14.0mm
 Terminal: PCB Type
 0.1A/None, 1A/UL, 3A/CE



DM1-02C



0.1A, 1A, 3A 125V AC
 SIZE: 12.8 x 6.5 x 5.7 mm
 OF: 20, 25, 30, 40g
 Pith: 5.08mm
 Lever: 15.0mm
 Terminal: Right Angle PCB Type
 0.1A/None, 1A/UL, 3A/CE




DM1-03D



0.1A, 1A, 3A 125V AC
 SIZE: 12.8 x 6.5 x 5.7 mm
 OF: 15, 20, 25, 35g
 Pith: 5.08mm
 Lever: 18.0mm
 Terminal: Right Angle PCB Type
 0.1A/None, 1A/UL, 3A/CE



DM1-13P

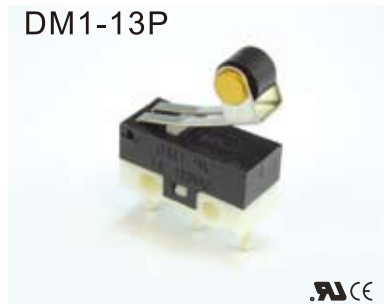

0.1A, 1A, 3A 125V AC
 SIZE: 12.8 x 6.5 x 5.7 mm
 OF: 30g
 Pith: 5.08mm
 Lever: 13.0mm
 Terminal: PCB Type
 0.1A/None, 1A/UL, 3A/CE



SM3-00N



3A, 5A 125/250V AC
 SIZE: 19.8 x 10.6 x 6.4 mm
 OF: 60, 80, 95, 115, 130, 150g
 Terminal: Solder Type(3.2mm)



SM3-01C



3A, 5A 125/250V AC
 SIZE: 19.8 x 10.6 x 6.4 mm
 OF: 17, 20, 25, 30, 35, 40g
 Lever: 14.5mm
 Terminal: Right Angle PCB Type



SM3-02L



3A, 5A 125/250V AC
 SIZE: 19.8 x 10.6 x 6.4 mm
 OF: 15, 17, 20, 25, 30, 35g
 Lever: 16.5mm
 Terminal: Solder Type(2.8mm)



SM3-04P



3A, 5A 125/250V AC
 SIZE: 19.8 x 10.6 x 6.4 mm
 OF: 13, 18, 23, 28, 30, 35g
 Lever: 15.8mm
 Terminal: PCB Type



SM3-05D



3A, 5A 125/250V AC
 SIZE: 19.8 x 10.6 x 6.4 mm
 OF: 17, 25, 30, 38, 45, 50g
 Lever: 14.5mm
 Terminal: Right Angle PCB Type



SM5-00N-115S-C5



5A 125/250V AC
 SIZE: 19.8 x 10.6 x 6.4 mm
 OF: 115g
 Terminal: Solder Type(3.2mm)



MICRO SWITCH / SEALED MICRO SWITCH

MICRO SWITCH / SEALED MICRO SWITCH

SM10-00P



10.1A 125/250V AC
 SIZE: 19.8 x 9.7 x 6.5 mm
 OF: 220, 250g
 Terminal: PCB Type

SM10-01N



10.1A 125/250V AC
 SIZE: 19.8 x 9.7 x 6.5 mm
 OF: 70g
 Lever: 21.6mm
 Terminal: Solder Type(2.8mm)

SM10-02N



10.1A 125/250V AC
 SIZE: 19.8 x 9.7 x 6.5 mm
 OF: 50g
 Lever: 28.45mm
 Terminal: Solder Type(2.8mm)

SW5-00N (Sealed)



5A 250V AC
 SIZE: 19.8 x 10.2 x 6.8 mm
 OF: 115, 130, 150, 175, 250g
 Terminal: Solder Type(3.2mm)
 Waterproof

SW5-00P (Sealed)



5A 250V AC
 SIZE: 19.8 x 10.2 x 6.8 mm
 OF: 115, 130, 150, 175, 250g
 Terminal: PCB Type
 Waterproof

SW5-04N (Sealed)



5A 250V AC
 SIZE: 19.8 x 10.2 x 6.8 mm
 OF: 40, 45, 50, 55, 90g
 Lever: 15.8mm
 Terminal: Solder Type(3.2mm)
 Waterproof

SW-05S (IP67)



5A 125V/250V AC UL
 6A 250V AC SEMKO, VDE
 SIZE: 19.8 x 15.15 x 6.4 mm
 OF: 70, 90, 95, 100, 300g
 AWG Type: 20, 22, 24, 26, 28, 30, 32, 34
 UL Number: UL1007, UL1015, UL1430,
 UL1061, UL1330, AV

DW-N3S (IP67)



10mA 12V DC VDE μ 5E5
 3A 125V AC / 12V DC VDE μ 1E5
 SIZE: 14.7 x 12.0 x 6.4 mm
 OF: 130g
 AWG Type: 20, 22, 24, 26, 28, 30, 32, 34
 UL Number: UL1007, UL1430,
 UL1061, UL1330, AV

MS5-04N



5A 125/250V AC
 SIZE: 21.0 x 10.0 x 6.3 mm
 OF=5g
 Pitch: 18.6mm
 Lever: 25.5mm

VM3-00N



3A, 5A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g

VM3-01K



3A, 5A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g

VM3-02N



3A, 5A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g
 Lever: 27.2mm

MICRO SWITCH

MICRO SWITCH

VM3-04N



3A, 5A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 28, 35, 45, 80, 125g
 Lever: 24.0mm

VM3-05N



3A, 5A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g
 Lever: 12.0mm

VM16-00N



16A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g

VM16-01N7



16A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g
 Lever: 13.5mm

VM16-02N



16A 250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 60, 80, 110, 160, 250g
 Lever: 27.2mm

VMS15-00N



10A, 15A 125/250V AC
 SIZE: 27.9 x 15.9 x 10.3 mm
 OF: 100, 160, 250g

VMS15-02N



10A, 15A 125/250V AC
 SIZE: 27.9 x 15.9 x 10.3 mm
 OF: 45, 75, 120g
 Lever: 27.2mm

VMS15-03N



10A, 15A 125/250V AC
 SIZE: 27.9 x 15.9 x 10.3 mm
 OF: 25, 40, 60g
 Lever: 51.7mm

VMS15-00H




10A, 15A 125/250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 100, 160, 250g

V3-25S-00D3



10, 16, 20, 25A 125/250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 150, 375, 505g
 *Disconnection-Gap<3mm

V3-25S-01D3



10, 16, 20, 25A 125/250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 75, 145, 158, 316g
 *Disconnection-Gap<3mm

V3-25S-04D3



10, 16, 20, 25A 125/250V AC
 SIZE: 27.8 x 15.9 x 10.3 mm
 OF: 50, 80, 115, 176g
 *Disconnection-Gap<3mm

MINI MICRO SWITCH

MINI MICRO SWITCH

DS-00T



50mA 30V DC
OF: 60, 100, 130g
6.2x6.2x7.45mm

SSM-001



500mA 30V DC
OF: 50g

SSM-002



500mA 30V DC
OF: 120g

DS-03T



50mA 30V DC
OF: 60, 100, 130g
6.2x6.2x5.7mm

SSM-001R(L)-L



Right Angle type
500mA 30V DC
OF: 50g

SSM-002R(L)-L



Right Angle Type
500mA 30V DC
OF: 120g

DS130-00□



0.1A 48V DC , 0.1A 125V AC
OF=70g
Pitch: 12.0mm
□ = P: DIP Type
= M: SMD Type

DS130-00C(D)



Right Angle Type
0.1A 48V DC , 0.1A 125V AC
OF=70g
Pitch: 10.25mm

DS130-01P



0.1A 48V DC , 0.1A 125V AC
OF=70g
Pitch: 10.25mm
Lever: 13.6mm

DS030B-00P



0.3A 6V DC
OF=40g
Pitch: 2.5mm

DS030C-00M



0.1A 48V DC , 0.1A 125V AC
OF=70g

DS030C-00P



0.1A 48V DC , 0.1A 125V AC
OF=70g
Pitch: 5.0mm