



FEATURES 設備特性

1. This machine is used to clean out the cured PUR adhesive inside the heating hose.
用於清洗保溫管內之PUR結皮。
2. May be used with 3/8 " and (or) 5/8 " heating hose.
3/8 "與5/8 "保溫管可共用。
3. Regularly cleaning the heating hose can efficiently extend the lifetime of heating hose.
保溫管經清洗過後可延長保溫管壽命。
4. Regularly cleaning hose can prevent unstable glue flow due to the blocking.
減少保溫管因阻塞後造成出膠不穩定。
5. Please use the cleaning oil suggested by the PUR supplier.
請使用PUR膠廠建議之清洗油。
6. With the S. Stainless filter mesh in the tank, to gather the hardened PUR dregs.
桶內附不鏽鋼濾網,可盛接結皮之PUR膠。



SPECIFICATIONS 設備規格

SPEC 規格	UNIT 單位	HS1104-OL
Tank Capacity 膠槽容量	Liter	5
Max. Operation Temp. 最高操作溫度	°C	200
Viscosity 使用黏稠度	CPS	8000
Available Hose 3/8"保溫管/5/8"保溫管	Set	1
Air pressure 使用氣壓	kg/cm ²	0.5 - 4
Dimensions (L x W x H) 尺寸(長 x 寬 x 高)	mm	430 x 340 x 730
Weight 重量	Kg	Approx. 39
Tank Heating Power 熔膠槽加熱功率	Watt	2000
Power Requirement 電力需求		220V AC, 12A, 50/60Hz, 1Φ

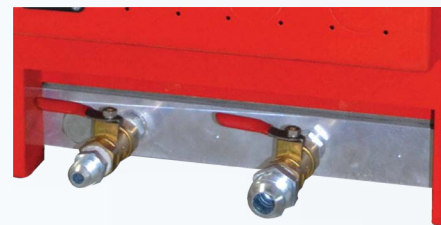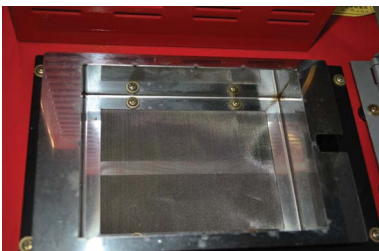

HWANG SUN ENTERPRISE CO., LTD. 皇尚企業股份有限公司

Headquarters 臺灣總公司

No. 8, Keji 1st Rd.,
Annan District, Tainan 70955, Taiwan
70955 台南市安南區科技一路 8 號 (科工區)
TEL: +886-6-3842889 FAX: +886-6-3842868

Taichung 臺灣台中

4F-4, No. 82, Daying W. 1st St.,
Nantun District, Taichung 40865, Taiwan
40865 台中市南屯區大英西一街 82 號 4 樓之 4
TEL: +886-4-24739593 FAX: +886-4-24714414

Taipei 臺灣台北

1F, No. 25-1, Hami St.,
Datong District, Taipei 10370, Taiwan
10370 台北市哈密街 25 之 1 號 1 樓
TEL: +886-2-25933744 FAX: +886-2-25923570

Suzhou 中國蘇州

Building No. 28, Li Tang Road, Kua Tang Town, Su Zhou
Industrial Park, Su Zhou City, Jiang Su Province, China
江蘇省蘇州市園區跨鎮蠡塘路逸苑別墅 28 棟
TEL: +86-512-67865516 FAX: +86-512-68557601

ISO 9001:2008 SGS REGISTERED FIRM

Dongguan Hwang Sun Industrial Co., Ltd. 東莞皇尚實業有限公司

Behind the Dongying Restaurant (Catty corner from No.
36 Liaoxia Rd., Liaoxia Ave.), Provincial Highway S256,
Liaoxia Village, Houjie Town, Dongguan 523960, China
中國東莞市厚街鎮寮廈村 S256 省道旁東盈酒店後
(寮廈大道寮廈路 36 號斜對面)
TEL: +86-769-81636099 FAX: +86-769-81636399

www.hes.com.tw | hwangsun@seed.net.tw