
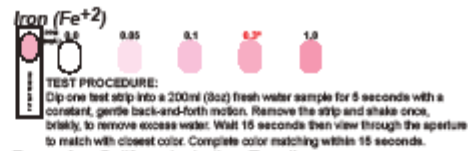

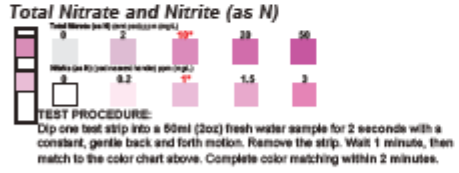





完整的家庭水質檢測試劑包(12 測項)

測試物質：鐵，銅，氯化物，硝酸鹽/亞硝酸鹽氮，pH 值，總鹼度，總氯，總硬度，游離氯，硫酸和硫化氫。

特點及應用：

這是一個創新的水質試紙產品。該套件包含，硝酸鹽，亞硝酸鹽，硫化氫，總硬度，總鹼度，總氯，游離氯，氯，銅，硫酸，鐵和 pH 值的測量。完整，快速檢測結果，幫您保持飲用水安全。

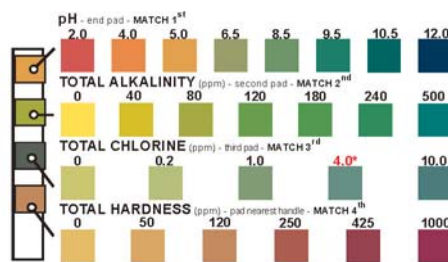


Bacteria - Coliform including E. coli

TEST PROCEDURE:
Read the enclosed Detail sheet for more information before running the test. Uncap supplied bottle and fill with water sample to be tested to 3/4 full. Recap bottle and let stand at room temperature for 48 hours. If the water turns from a purple color to a yellow color, then bacteria are present. Please consult your local health department or water treatment specialist for treatment recommendations.

Hydrogen Sulfide

TEST PROCEDURE:
Add water sample to be tested to the top line of two vials. Dip one (1) Hydrogen Sulfide test strip into one of the vials for 20 seconds with a constant, gentle back-and-forth motion. Remove the strip from the vial (the sample in the vial will have a brown appearance when Hydrogen Sulfide is present). Place the sample vial on the spot marked "Place Sample Vial on Circle". Place the second vial containing the clear water over the spot marked "Place Blank Vial on Circle". Slide both vials, simultaneously, until the blank vial has the best match with the color of the sample vial, when viewed from the top. When matched, read the amount of Hydrogen Sulfide concentration. Complete the color matching within one (1) minute.

*MCL = Maximum Contaminant Level

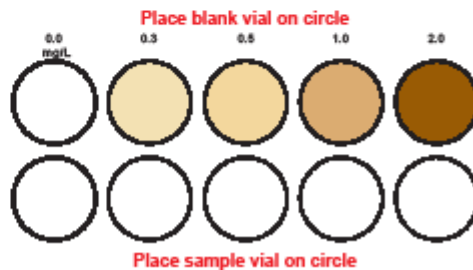

產品特點：

- 飲用水水質檢測試劑包
- 根據被測試的物質，測試時間各不相同
- 測試物質：
 - 亞硝酸鹽（2 件測試）
 - 硝酸鹽（2 件測試）
 - 硫化氫（2 件測試）
 - 總硬度（2 件測試）
 - 總鹼度（2 件測試）
 - 總氯（2 件測試）
 - 游離氯（2 件測試）
 - 氯化物（2 件測試）
 - 銅（2 件測試）
 - 硫酸（2 件測試）
 - 鐵（2 件測試）
 - pH 值（2 件測試）
- 測試範圍：

測試範圍：

鐵：0.0，0.05，0.1，0.3，1.0 PPM（毫克/升）
銅：0，0.1，0.5，1.0，2.0 PPM（毫克/升）
氯化物：0，250，500 PPM（毫克/升）
硝酸鹽：0，2.0，10，20，50，ppm 的（毫克/升）
亞硝酸鹽：0，0.2，1.0，1.5，3.0 PPM（毫克/升）
pH 值：2.0，4.0，5.0，6.5，8.5，9.5，10.5，12
總鹼度：0，80，120，180，240，500 PPM（毫克/升）
總氯：0，0.2，1，4，10 PPM（毫克/升）
總硬度：0，50，120，250，425，1000 ppm 的（毫克/升）
游離氯：0，0.5，0.2，0.6，1.5，4.0，10 PPM（毫克/升）
硫酸：0，250，500
硫化氫：0，0.2，2.0 PPM（毫克/升）

應用範圍：

- 飲用水
- 廢水
- 園藝用水
- 冷卻塔/鍋爐水樣
- 灌溉用水